

Clear out FailedJobs, temporary files and database (Lasename 10)

Adam McStravick - 2023-11-01 - Comments (0) - Lasename General Information

Lasename

It might sometimes be necessary to clear Lasename database and temporary files. The reasons can vary, but these are the main examples:

- There are many FailedJobs slowing down the Lasename application.
- A Lasename job keeps running while stuck in a loop, causing Lasename to crash persistently.

This article explains how to clean your Lasename application.

Clean Up Lasename

Warning

Following this procedure will remove:

- All active jobs
- Any jobs paused for the Lasename client

Follow these steps:

1. Ensure Inputs are paused and no jobs are running through Lasename.

Note


If necessary, wait for any jobs to finish processing through Lasename. You can check status using Lasename Monitor.

2. Close all Lasename applications.
3. Open Services and stop the Lasename 10 and Lasename Config 10 services. Alternatively, end them using Task Manager.
4. Open Task Manager and end the `sqlservr.exe` task.


Note

This is the process handling LocalDB for both service instance and config – because it

is not a service, it cannot be stopped via services.

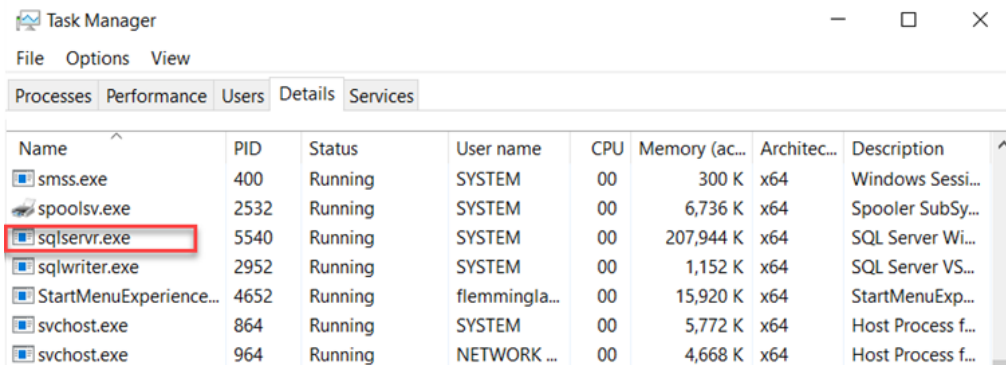

5. Clear all folders indicated in the following screenshot:

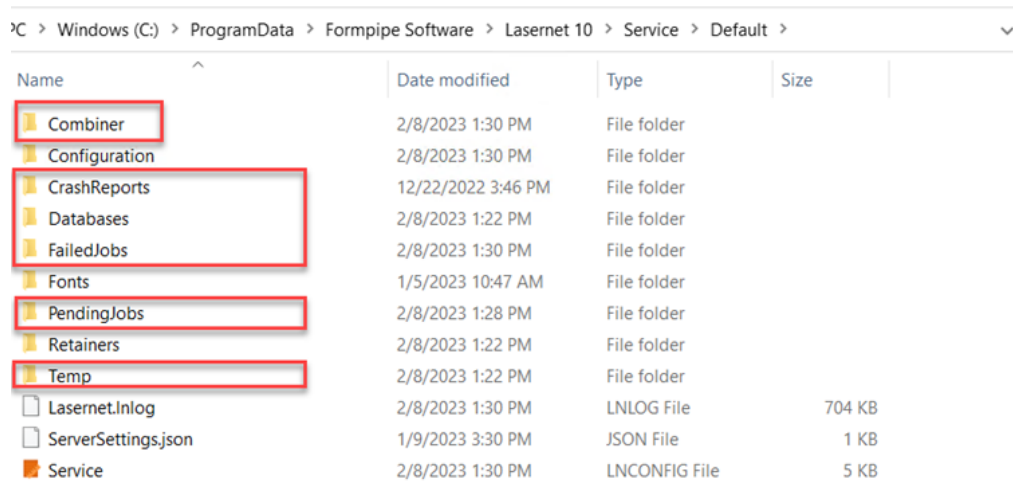

Note

- The Programdata folder might not be visible because it is hidden. In that case, type it in the search field.
- The databases folder only contains information including FailedJobs, ScheduledJobs, Pausejobs.
- There is nothing about the Lasernet configuration. If you use SQL Server as a database for running jobs, delete or rename the database yourself using your preferred SQL tool.

1. Go to Services and restart the Lasernet 10 service first, followed by Lasernet Config 10.

Note

The service database will be re-created in the database folder.

1. Resume inputs, if any.


Lasernet will now be up and running again.

Troubleshooting

This section applies if you still have a problem after following the steps in the previous section.


It is possible to clear the running configuration loaded to the service. Follow these steps:

1. Repeat steps 1-5 in the previous section.
2. Open the Configuration folder and delete the files and folders.

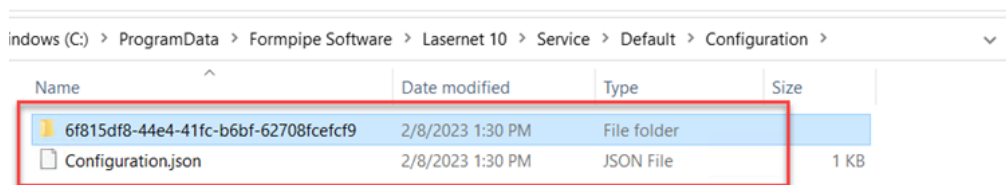

3. Repeat steps 6 and 7 in the previous section.

The service will start without the configuration loaded in Lasernet Monitor, as shown.



1. Commit/Patch from Lasernet Developer to reload the configuration to the service.