

## How do I add additional Archive Paths in Autoform DM 10 or later?


Kacper Dylewski - 2024-01-10 - Comments (0) - Autoform DM FAQs

# Autoform DM

This article will explain how to add additional Archive Paths to Autoform DM version 10 or later. We suggest you use this guide if your current storage is becoming full and you want to start archiving images to a new location.

Opening the REST API Documentation.

1. Log into Autoform DM.
2. Click the **Information** button shown in the following image.
3. Select **REST API documentation**, which will open the swagger documentation in a new tab.

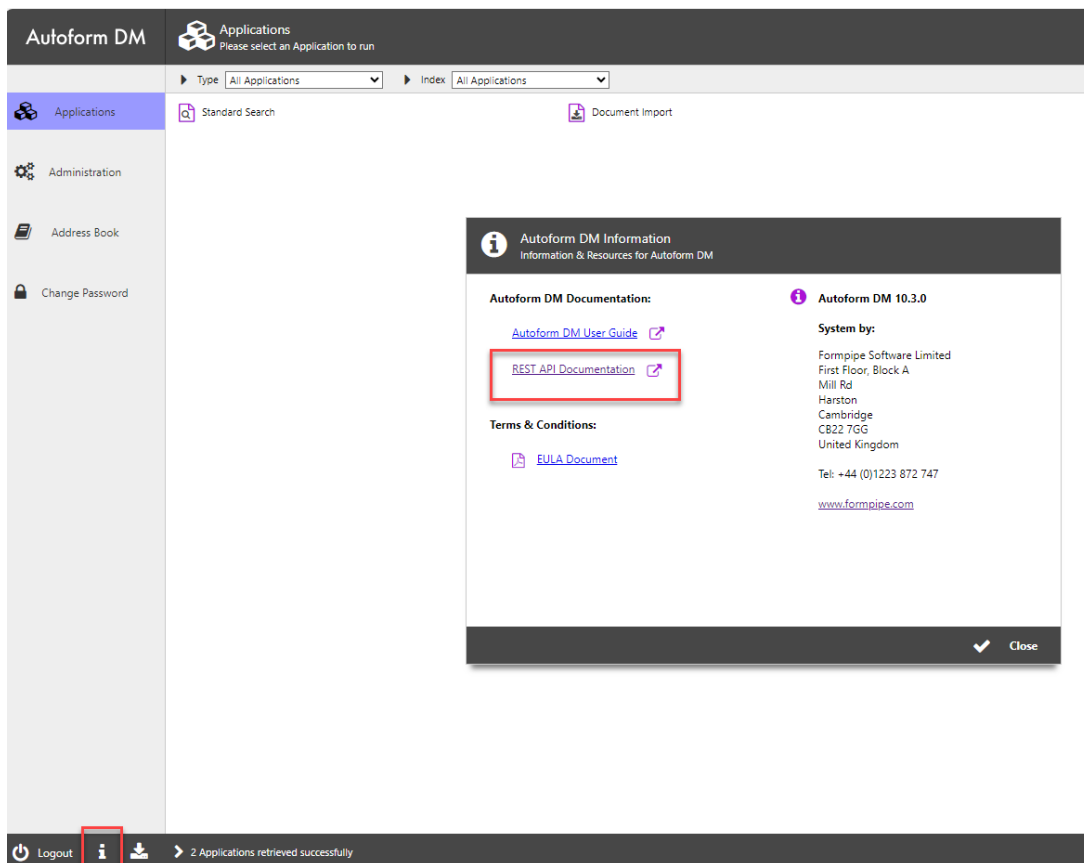


4. Scroll down through the document until you reach a section where you can execute the REST API commands.


REST API commands

The recommended REST API commands:

**A:** Archive Paths are managed using the **/archive-paths** resource:



**B:** Review what archive paths are present in the system by using **GET /archive-paths/paths**:




This will return archive paths in JSON format, for example:

```
[  
  {  
    "name": "file-path-1",  
    "type": "DIRECTORY",
```

```
    "path": "c:/archive"
  },
  {
    "name": "file-path-2",
    "type": "DIRECTORY",
    "path": "c:/archive/chunks";
  }
]
```


This lists all archive paths in the system, hence including the **documents** and **chunks** paths.

**C:** To identify which path is currently set as either the **document** or **chunks** paths use the following operations:

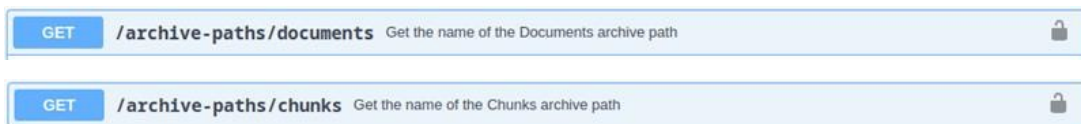

These will return the name of the archive path set for each purpose, for instance: file-path-1.

**D:** To add a new archive path in addition to the existing one, use **POST /archive-paths/paths**.




For example, adding a new path called "my-new-path" in the location "c:\other-archive" you would use:

```
{
  "name": "my-new-path",
  "type": "DIRECTORY",
  "path": "c:/other-archive"
}
```


When executing this, ensure you see a **200 OK** response.

You can verify the path has been added by using the **GET** operation from command **B** - you should see it now listed in the response.

**E:** The new archive path is now ready for use and can be set as the new **document** or **chunk** path as desired using:



PUT /archive-paths/documents Sets the name of the Documents archive path



PUT /archive-paths/chunks Sets the name of the Chunks archive path

For example, to set the newly added path my-new-path as the **document path** use the first option from above and set the body to the new archive path name, e.g.



PUT /archive-paths/documents Sets the name of the Documents archive path

Parameters Cancel

No parameters

Request body text/plain

Edit Value | Model

my-new-path

#### Note

1. The above example shows the use of a forward slash "/" in the path because a single "\" backslash is treated as an escape character. However, for UNC path eg \\efspdm-02\efs\archive. Please use a double backslash for each single back slash for example:

```
"path" : "\\efspdm-02\efs\archive"
```

2. This process will not create the new folder. To do that use Windows File Explorer.

3. After setting this up all new images will be archived to the new location, but searches for older documents will still pull the image from the old location.