

## How do I Use Lasename Cloud Print Connector with Multiple Configurations?

Kate Coles - 2023-12-01 - Comments (0) - Lasename FO Connector FAQs


# Lasename for Dynamics 365

The purpose of this article is to give an introduction on how to use the Lasename Cloud Print Connector with multiple configurations.



The Lasename Cloud Print Connector is used when printing to a printer on which Dynamics 365 does not have direct access. Lasename Cloud Print Connector can also be used for printing from Lasename FO Connector. A hybrid is also supported in which printers are loaded from the Lasename Cloud Print Connector and printing is from the Lasename server.

### Lasename Cloud Print Connector - Multiple configurations


1. Click the Lasename Cloud Print Connector UI icon.

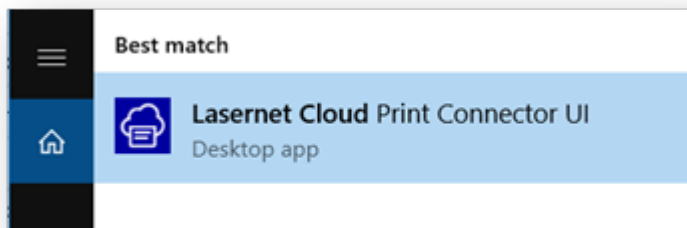

2. Click **Open file location** from the drop-down and click **Properties**.

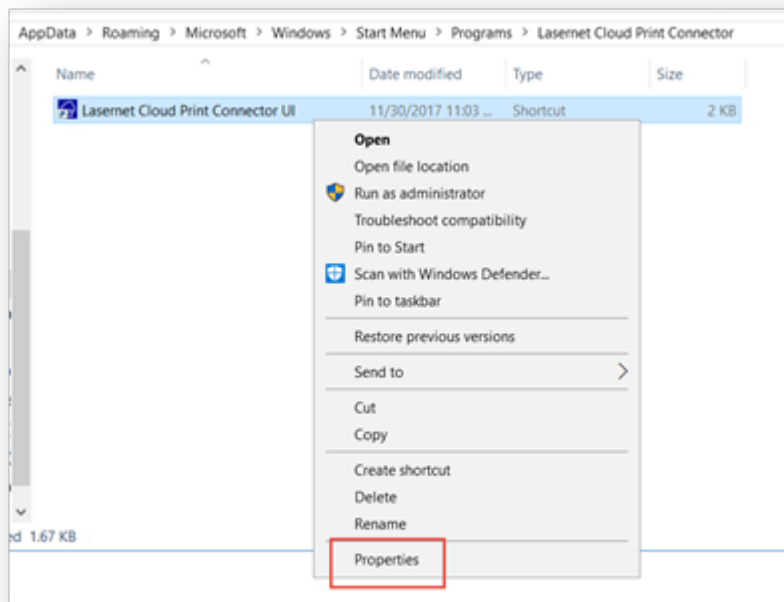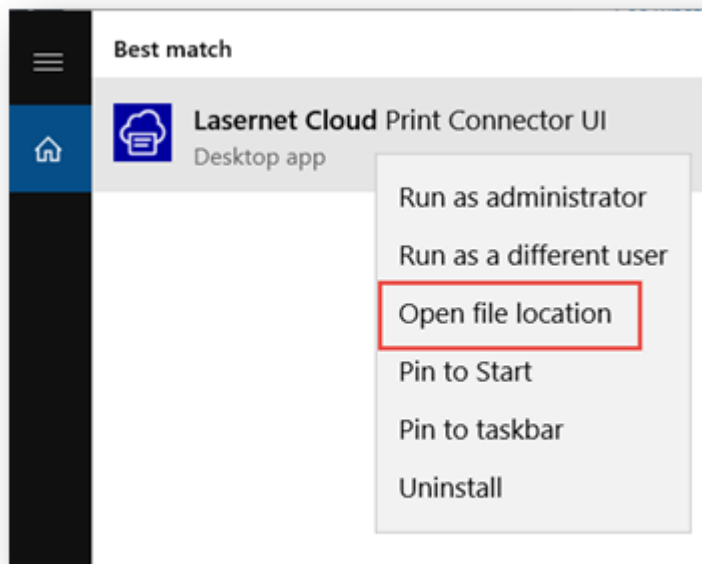




3. Make a copy of the existing folder containing the Lasernet Cloud Print Connector and copy this folder into another location.

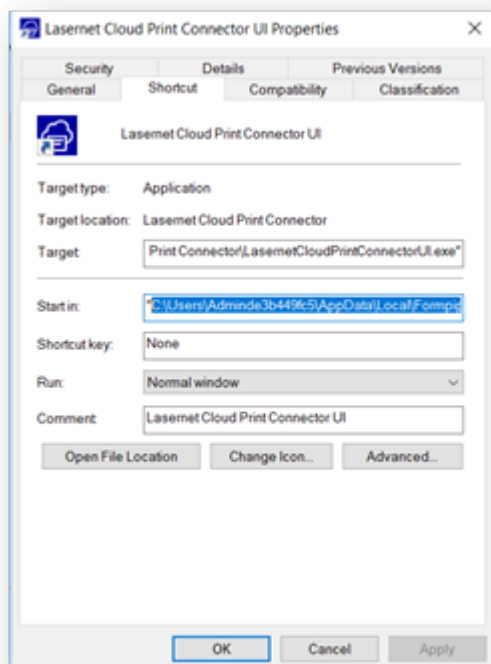

Ny diskenhed (E:) > Training > PU10

	Navn	Ændringsdato	Type	Størrelse
	ConnectorConfiguration.cloudprintconfig	04-12-2017 21:20	Lasernet Cloud Pri...	5 KB
	ConnectorConfiguration.config	04-12-2017 21:42	CONFIG-fil	5 KB
	ConnectorUIConfiguration.config	04-12-2017 21:24	CONFIG-fil	1 KB
	LasernetCloudPrintConnectorService.exe	13-11-2017 12:57	Program	224 KB
	LasernetCloudPrintConnectorService.exe...	01-05-2017 15:10	CONFIG-fil	3 KB
	LasernetCloudPrintConnectorUI.exe	13-11-2017 12:57	Program	375 KB
	LasernetCloudPrintConnectorUI.exe.Config	04-12-2017 21:24	CONFIG-fil	3 KB
	LasernetEvent.dll	13-11-2017 12:57	Programudvidelse	20 KB
	LasernetOnPremConnectorLibrary.dll	13-11-2017 12:57	Programudvidelse	442 KB
	LasernetPrinter.Data.dll	13-11-2017 12:57	Programudvidelse	29 KB
	LasernetPrinter.dll	13-11-2017 12:57	Programudvidelse	92 KB
	Logo.ico	13-11-2017 10:56	Ikon	105 KB
	Microsoft.Azure.KeyVault.Core.dll	13-11-2017 10:56	Programudvidelse	22 KB
	Microsoft.Data.Edm.dll	13-11-2017 10:56	Programudvidelse	655 KB
	Microsoft.Data.OData.dll	13-11-2017 10:56	Programudvidelse	1.501 KB
	Microsoft.Data.Services.Client.dll	13-11-2017 10:56	Programudvidelse	666 KB
	Microsoft.ServiceBus.dll	13-11-2017 10:57	Programudvidelse	3.477 KB
	Microsoft.WindowsAzure.Storage.dll	13-11-2017 10:57	Programudvidelse	1.094 KB
	Newtonsoft.Json.dll	13-11-2017 10:56	Programudvidelse	637 KB
	pu10.bat	04-12-2017 21:30	Windows-batchfil	0 KB
	regid.1999-10.com.formpipe_Lasernet CL...	04-12-2017 21:16	SWIDTAG-fil	2 KB
	SharedInterfaces.dll	13-11-2017 12:57	Programudvidelse	165 KB
	System.Spatial.dll	13-11-2017 10:56	Programudvidelse	125 KB


4. Download the configurations file for the Lasernet Cloud Print Connector [ConnectorConfiguration.cloudprintconfig].

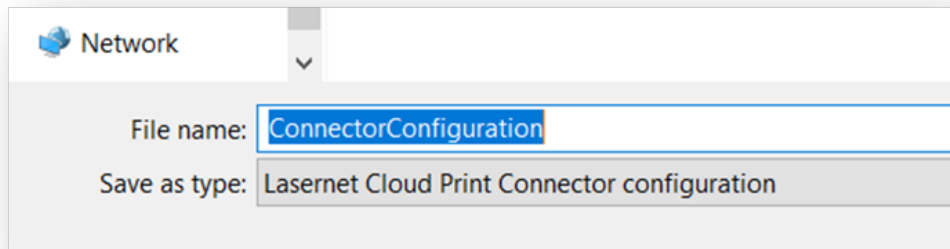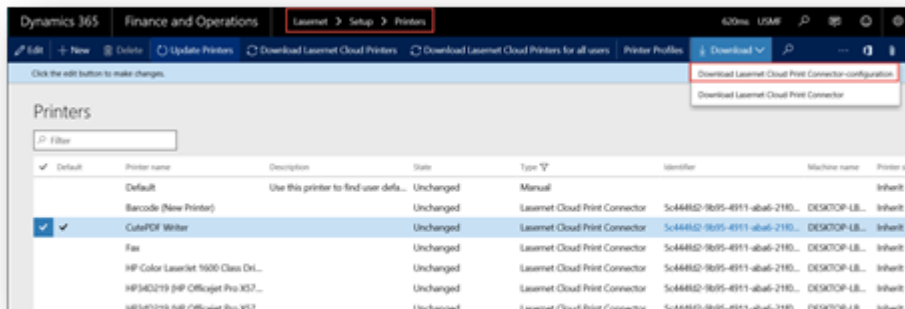

5. Once the file is downloaded, open the file in Notepad.

6. Replace the context of the file 'ConnectorConfiguration.config' except for the first line with the context in the file ConnectorConfiguration.cloudprintconfig).

Open ConnectorConfiguration.cloudprintconfig in Notepad).

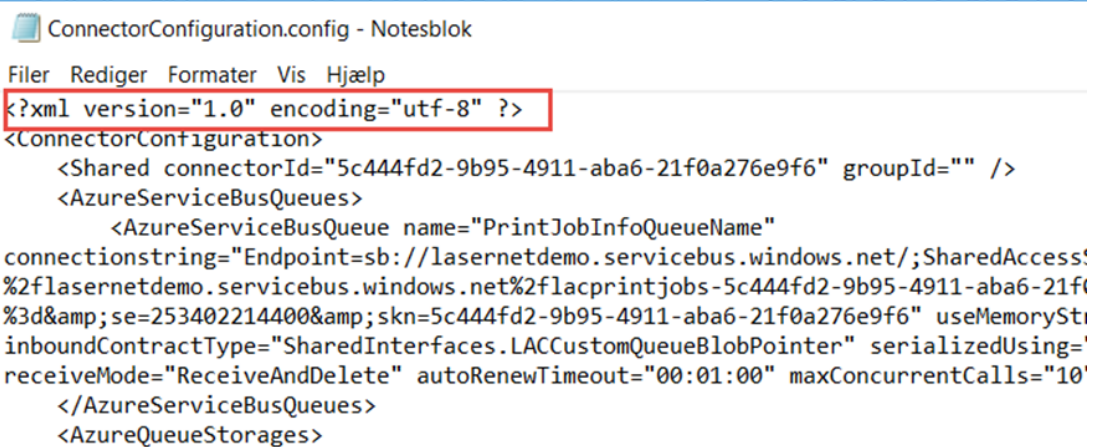

7. Use the following command to create a new service hosting the configuration. Repeat for UAT and DEV:

*sc create "<Unique Service-name>" binPath= "<Service path>\LasernetCloudPrintConnectorService.exe" DisplayName= "<Display name>"*

**Example:**

```
E:\Training\PU10>sc create "CloudPrintConnector_DEV" binpath="C:\Lasernet\LasernetCloudPrintConnectorService.exe" DisplayName="CloudPrintConnector_DEV"
```

*sc create "CloudPrintConnector\_DEV"  
binpath="C:\Lasernet\LasernetCloudPrintConnectorService.exe"  
DisplayName="CloudPrintConnector\_DEV".*

8. Locate the service, add the credentials on which the printers are installed and then start the service.

It is now possible to load the printers from LAC365 using the config/Guid Id.